



PT. TANGGUH BENINGMAS PRATAMA

BROSUR

SEWAGE TREATMENT PLANT



Compact Design




Low Power, Save Energy



Wide Range Application






SERVICES OVERVIEW

The domestic sewage treatment plant (STP) Bio Tangguh uses a Biofilter / Biocell system with construction from Fiber Reinforced Plastic / FRP. With a cylindrical shape so it does not require deep digging holes. Suitable for use in public places, such as malls, apartments, hotels, housing, offices, terminals, airports, hospitals, etc.

● The Advantages of STP Bio Tangguh

- Wastewater meets environmental quality standards
- Easy installation of lightweight FRP construction
- The land required is relatively small.
- Cost Effective
- Easy Maintenance
- Durable and can be moved when needed
- Can be upgraded as needed
- Low Power

General Process Flow Diagram

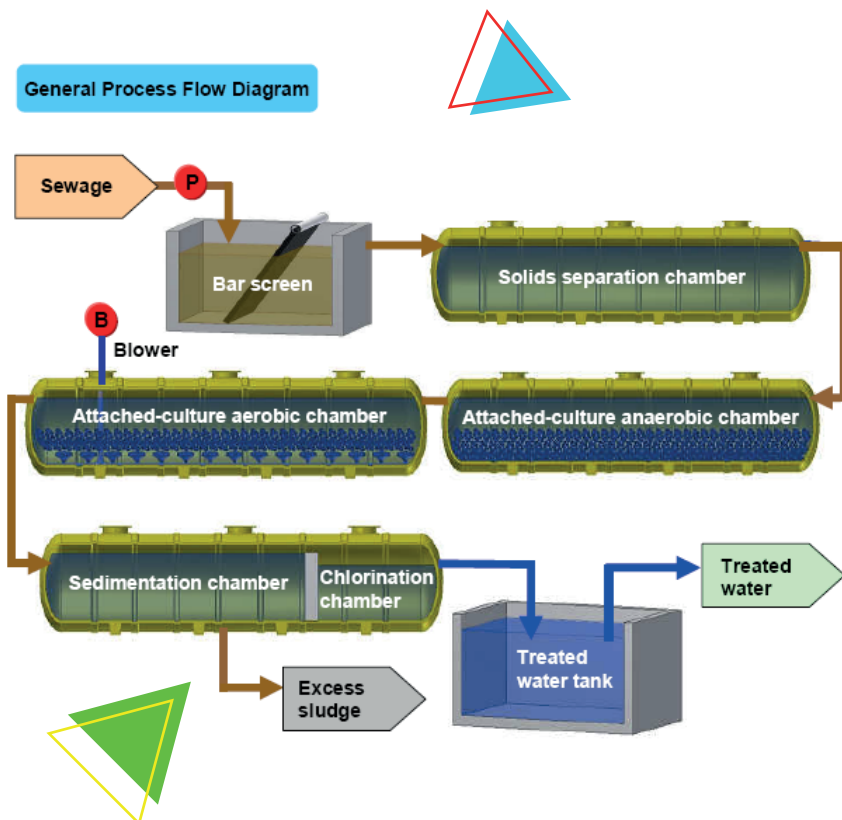



Type	Dimensions	Capacity	Volume
BT - 05	D 135 cm x L 350 cm	20 - 30 Persons	5000 Ltr
BT - 06	D 150 cm x L 350 cm	30 - 40 Persons	6000 Ltr
BT - 07	D 150 cm x L 400 cm	40 - 50 Persons	7000 Ltr
BT - 08	D 150 cm x L 460 cm	50 - 60 Persons	8000 Ltr
BT - 09	D 150 cm x L 520 cm	60 - 70 Persons	9000 Ltr
BT - 100	D 175 cm x L 400 cm	80 - 100 Persons	10.000 Ltr
BT - 120	D 175 cm x L 500 cm	100 - 120 Persons	12.000 Ltr
BT - 150	D 175 cm x L 600 cm	120 - 150 Persons	15.000 Ltr
BT - 160	D 200 cm x L 510 cm	150 - 170 Persons	16.000 Ltr
BT - 170	D 200 cm x L 550 cm	170 - 200 Persons	17.000 Ltr
BT - 180	D 200 cm x L 570 cm	200 - 220 Persons	18.000 Ltr
BT - 190	D 200 cm x L 600 cm	220 - 240 Persons	19.000 Ltr
BT - 200	D 200 cm x L 650 cm	230 - 260 Persons	20.000 Ltr
BT - 250	D 200 cm x L 800 cm	250 - 280 Persons	25.000 Ltr
BT - 300	D 250 cm x L 620 cm	280 - 300 Persons	30.000 Ltr



PT. TANGGUH BENINGMAS PRATAMA



Address

Multipiranti Graha, 3rd Floor
Jl. Radin Inten II No. 2,
Duren Sawit, Jakarta 13440
Indonesia



Phone

+6221 220 89026



e-Contact

www.tangguhbening.com
info@tangguhbening.com